

經驗與理論的融匯

**CHINEE**®  
INSTRUMENT CO., LTD.

**產品項目：**

**Oxygen & Dust Free. / Humidity Chamber. /  
Environmental System. / Oxidation Free. /  
Conveyor Feed Oven. / Precision Oven. /  
UV / IR Reflow. / UV Curing.**

無塵精密烤箱 / 恆溫恆濕箱 / 環境試驗設備 /  
無氧化烤箱 / 自動輸送烘乾機 / 工業  
乾燥烤箱 / UV/IR 乾燥熔爐 /  
紫外線乾燥機



PRECISION FORCE **AIR**  
精密型熱風循環烤箱

睿智的設計 — 乾燥效率與性能的極致呈現

# CHINEE Drying Equipment Dramatically Increase Proc

CHINEE'S new generation of drying equipments can help you achieve superior efficiency and durability for a wide variety of products. They integrates many fine features, making them ideal for those who have high production demands.



CNSS-1

## OPTIONAL EQUIPMENTS 選購配備


<p><b>THERMOSTATOR</b> (Other thermostator is available) <b>溫控器</b> (下列以外控溫器亦可指定)</p>	<p><b>RKC-P-200</b> Programmable 256 steps, available to be on-line with printer 可程式256段,可外接電腦列表 (RS-232C ,RS-422A)</p> 	<p><b>RKC-P-96</b> Programmable 16 steps 可程式16段</p> 	<p><b>RKC-CB-900</b> Single step (standard) 單段 (標準配件)</p> 	<p><b>數位指示 M-302</b> Single step (standard) 單段 (標準配件)</p> 
---	---	--	---	---

<p><b>RECORDER</b> <b>記錄器</b></p>	<p><b>YOKOKAWA</b> UR-1000 6 points 6 點</p> 	<p><b>YOKOKAWA</b> UR-1000S 6 points 6 點</p> 	<p><b>YOKOKAWA</b> SR-1000 6 points 6 點</p> 	<p><b>CHINO</b> BL 6 points 6 點</p> 
---------------------------------------	---	--	---	---

(Available to be on-line with printer 均可外接電腦、列表機)

<p><b>TIMER</b> <b>計時器</b></p>	<p>30 Min, 999 Min (standard), 24H, 99H, programmable timer for date, month and year. 30分, 999分 (標準配備), 24H, 99H, 年月日可程式計時器。</p>
------------------------------------	--

<p><b>ELECITY OUTPUT</b> <b>電力輸出</b></p>	<p>Available to be fitted with automatic electricity regulator for SSR,SCR, and SSPR...etc. 可按裝SSR、SCR、SSPR等電力自動調整器。</p>
--	--

<p><b>VARIOUS SHEETS FOR CHOICE 盤具選擇種類</b></p>			
 <p>Plated griddle plate (or stainless steel) 電鍍網皿 (或不銹鋼)</p>	 <p>Stainless steel solid plate 不銹鋼密盤</p>	 <p>Zinc plated mesh tray (stainless steel mesh tray) 鍍錫網皿 (不銹鋼網皿)</p>	 <p>Stainless steel round hole plate (4 sides / 3 sides upward) 不銹鋼圓孔皿 (4面 / 3面向上)</p>

# ents activity.



CNSS-2



CNSS-3



CNSS-4


## FEATURES:

1. Clean and elegant external appearance. Ruggedly constructed for high durability.
2. Specially designed roller type porcelain stands. High efficiency heater wires for great power saving performance.
3. Double circuit protection provides maximum safety guard.
4. The powerful air flow system employs E class insulation, and over IP44 class protection. Special designed air circuit and single side horizontal lamina flow assures dependable baking quality.
5. The convex type insulation door is fitted with the patented stainless steel hinge. (Patent no. 102004). The lock handle avoids dropping problem. Smooth door opening, and excellent air tightness performance.
6. Available to be fitted with Nitrogen gas flow meter, temperature recorder, programmable temperature control timer, and can be on-line with printer....
7. Electrical system can be made to meet the specific requirements of electrical regulations in various countries.

## 特點：

1. 外表清爽美觀，機構堅實耐用。
2. 特製輪型瓷架配合高效率進口高熱線，節電最佳。
3. 複式線路保護設計，可確保顧客身家財產之安全。
4. 使用絕緣等級E級，防護等級IP(44)以上之強力迴風系統，配合特製風路，單面層流水平送風設計，使烘烤品質最安心。
5. 凸式絕熱門，使用峇益開發專利不銹鋼後鈕（專利証號102004號）及附鎖把手，可防止下墮，能確保門之開關順心如意，氣密性佳。
6. 可依使用需求加裝氮氣流量計；溫度記錄器，可程式控溫計時器，外接電腦列表機...
7. 可配合各國電力標準及其它要求規範設計製作。

# DESCRIPTION OF CONTROL PANEL 特製鋁質印刷面板說明

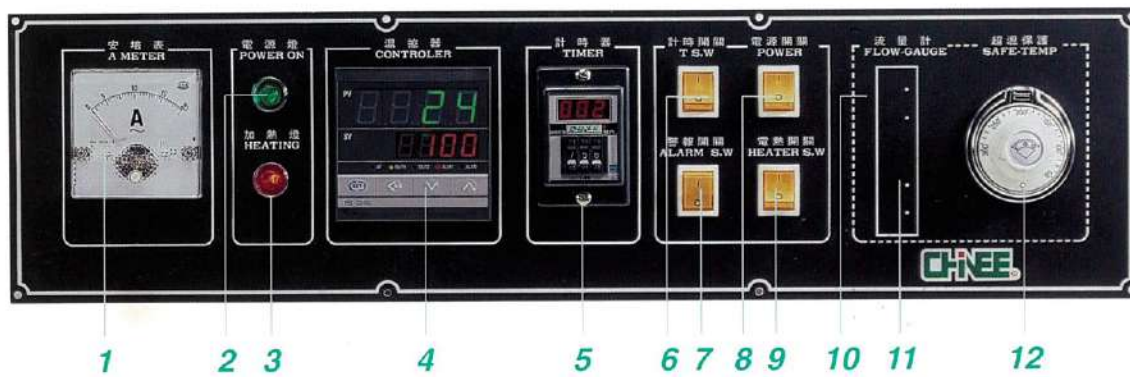

- |                            |   |         |                 |
|----------------------------|---|---------|-----------------|
| 1. Ampere meter            | 7. Alarm switch                           | 1. 電流表  | 7. 警報開關         |
| 2. Power indication lamp   | 8. Power switch                           | 2. 電源燈  | 8. 電源開關         |
| 3. Heating indication lamp | 9. Heating switch                         | 3. 加熱燈  | 9. 電熱開關         |
| 4. Thermostat              | 10. Reserved recorder switch (OPTIONAL)   | 4. 溫控器  | 10. 記錄器預留孔 (選購) |
| 5. Timer                   | 11. Reserved flow meter switch (OPTIONAL) | 5. 計時器  | 11. 流量計預留孔 (選購) |
| 6. Timer switch            | 12. Over temperature protection (OTP)     | 6. 計時開關 | 12. 超溫保護器 (OTP) |

MODEL	型 式	CNSS-1	CNSS-2	CNSS-3	CNSS-4
Inside capacity	內箱容量	80 ℓ	195 ℓ	285 ℓ	504 ℓ
Inside dimensions (W x D x H)(cm)	內尺寸 寬X深X高(cm)	45x40x45	60x50x65	60x50x95	80x60x105
Outside dimensions (W x D x H)(cm)	外尺寸 寬X深X高(cm)	84x69x123	96x79x142	96x79x171	115x89x183
Packing dimensions	裝箱尺寸	104x100x145	116x100x165	116x100x195	135x110x205
Weight	淨重	220kgs	300kgs	340kgs	395kgs
Power	電力	220V1ø/3ø	220V1ø/3ø	220V1ø/3ø	220V1ø/3ø
(Depends on requirement)	(依國別可設定)	3kw	4kw	4kw	5kw
Number of sheet	層架	4	6	9	10
Interior material	內部材質	Non-magnetic stainless steel SUS 304# 全無磁性不銹鋼板 SUS 304#			
Exterior material	外部材質	Mild carbon steel plate, rust preventive and baking painting treated 中碳鋼板SS41# 經防銹處理後烤漆			
Range of temperature	溫度範圍	Room temperature 10°C to 200°C 室溫RT加10°C至200°C			
Temperature distribution	溫度分佈	± 1.5%			
Heat raising time	昇溫時間	Room temperature 10°C to +200°C, about 30 Min(No load) 室溫+200°C約30分鐘(無負載)			
Heat insulation	斷熱保溫	Imported rock wool for insulation 進口岩棉保溫絕熱			
Door	門	Convex type single door (Imported lock handle, patented stainless steel hinge) 凸式單門(口附鎖把手, 不銹鋼專利後鈕)			

- STANDARD ACCESSORIES: Spared fuse, Operation manual, Circuit diagram, parts list, Certification of warranty, Plated griddle plate 4 pcs.
- 標準配備：備份保險絲、使用說明書、線路圖、零件清單、保證書各一份，電鍍柵皿4片。
- Specifications and design characteristics are subject to change without prior notice.
- 本公司之產品規格、設計特性均不斷研究改進，規格若有變更，恕不另行通知。



**天宜科技股份有限公司 TEN BILLION TECHNOLOGY CO., LTD.**

□71042台南縣永康市蔦松三街140巷8弄9號 / Tel:06-2436688 / Fax:06-2432720  
 □台北服務處 / Tel:02-82922016 <http://www.tbillion.com.tw>